

Portable Digital Video Recorder

User's Manual

For

PDVRS 04/08



SILHOUETTE SURVEILLANCE SYSTEMS

CH3. How to Use

3-1. General Usage Information

CH 3 How to Use

The DVR system can be operated with a mouse or remote controller under the four main modes listed below:

Live Mode – This is the “main or default” mode. From this mode you can view in real time all currently operating cameras, information regarding camera status, and have access to Pan/Tilt camera controls. In addition, system status information will be shown during live mode, and other modes can be entered from Live mode.

Setup Mode – The user will be able to customize settings for Live viewing, Recording, Backup, and Camera related devices under the Setup Mode.

Search Mode – In Search Mode, the user will be able to review all recorded footage in the case that an event must be reviewed using a calendar or event based search.

Backup Mode – In Backup Mode, the user will be able to archive the desired data to the preferred supported media of their choice (ex. CD, DVD, USB Backup, Remote Client Software, etc.)

Password Protection – The DVR system will utilize a user ID and password system to prevent unauthorized usage of this product. Control of the system will only be possible after entering a proper ID and password as illustrated below. (Factory Default settings are blank for these fields).



3-2. LIVE Mode

In this the Live Mode you are able to split the video mode into 1 or 4, as well as select an auto sequencing mode. From this mode enter into other functions such as setup, search or backup. (if using the mouse this is done with a “right click”



3-2-1. LIVE Mode Control

1) Live View Status

The
ex-
mean-
tus
on the

	Recording indicator
	Event recording indicator
	Motion detection indicator
	Sensor activation indicator
	POS indicator

table below
plains the
ing of the sta-
indicator icons
screen

2) Live Menu Bar

You may use the Live Menu Bar located at the bottom for quick shortcuts and view




	Date
	Time
	Screen Split mode change
	Sequence activation
	Hard drive usage
	Lock/ Unlock indicator
	Scheduler activation indicator
	Network connection indicator
	Audio out channel indicator
	Audio Mute indicator

3) Live Popup Menu

By Right-Clicking anywhere on Live Screen, you may view the Live Popup Menu.

By using the Live Popup Menu, you can quickly jump to the necessary configuration and settings

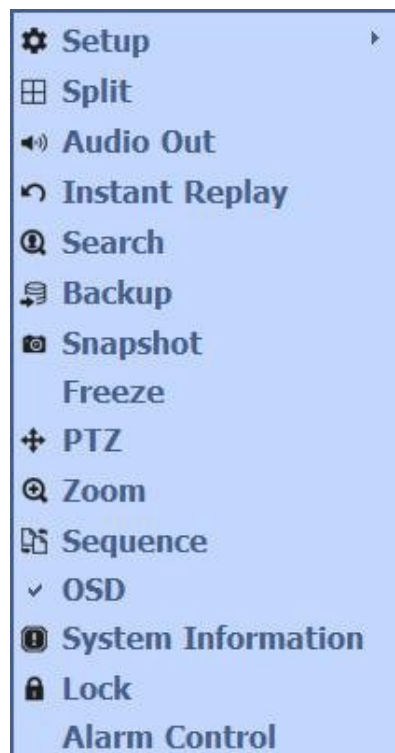

3-2-2. LIVE Mode Feature

CH 3 How to Use

1) Setup : refer to full manual

2) Split



Change video split mode for Live View.

3) Audio Out



You can choose the audio out

from this menu.

4) Instant Replay

This is a very convenient function to catch the recent incidents During live viewing,



you can go directly to the playback screen.




If you choose the 'Instant Replay' , the DVR goes to the 'PLAY' with the present time screen. And you can use the functions related playback.


6) Backup

There are two ways to enter the backup. The first one is that right click on the live screen, and the second one is that enter directly from 'Search' upon playback. If you choose the 'backup' from the live menu, below backup screen appears.

- You can set the backup device, time and channel from the backup screen.

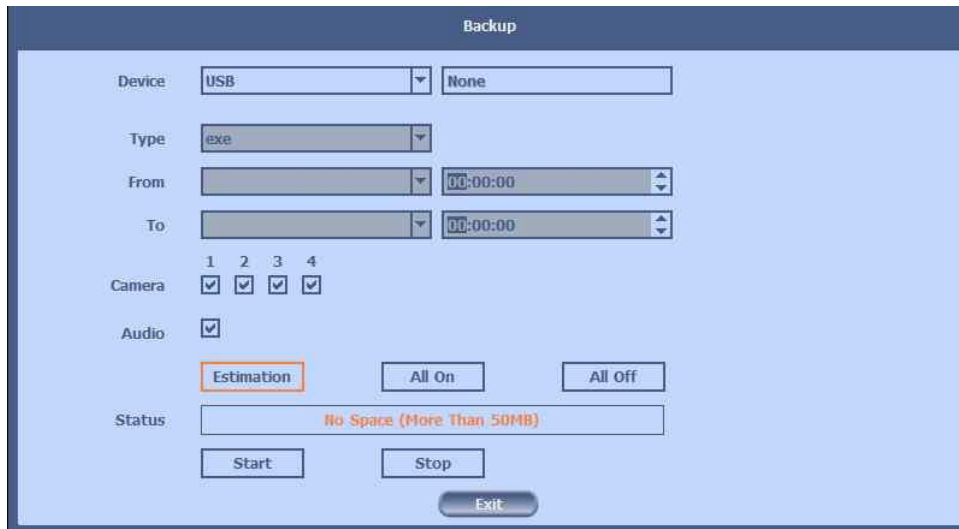

- After that, if you will show the estimated file size.

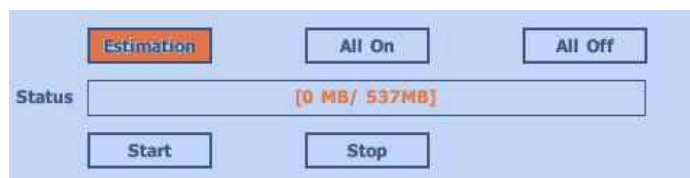

push the 'Estimation' button, it mated backup

- Then click the 'Start' button.

WARNING

Do NOT remove the backup device till end and system may be damaged.



sign. The device

Snapshot

You can save the live snapshot by this menu. All channel will be saved individually to the USB memory by JPG format . You should put in USB memory before saving.

Freeze

You can freeze the current live video channels

Zoom

Digital zoom of live screen for selected channel. It can be 8x zoom and also control the position by mouse dragging.

Sequence

Sequence Mode On /Off: Switches screens as set on Dwell time under Screen Setup

OSD

This feature shows current settings of product through GUI (Graphic User Interface) and INFO button at front side is used for this feature. When you turn on power, this will show current date and time, System Lock Setting, HDD usage, Video Loss Check, Sensor ON/OFF, Motion Detection Check, Recording Status and Schedule Feature Usage. As you press INFO button once more, GUI disappear->OSD disappear->GUI appear->OSD appear will happen sequentially.

- GUI (Graphic User Interface): displaying current status on monitor as images
- OSD (On Screen Display): displaying current status on monitor as character

System Information

It shows the system


System Information	
Firmware version	1.0.4.4
HDD	0/160 GB
MAC Address	00:09:1B:00:01:02
IP	192.168.1.10
Connected IP	
Watch User	0
Search User	0
Setup User	0
Oldest Date	2012/07/27 00:00:00
OK	

information.

Lock/Log In

Search Mode

Search mode consists of two different modes of searching. The video data can be selected by 5 modes.



Time	Search by Month / Day / Time selection.
Event	Select from Event Log.
POS	Search by POS transaction data.
Thumbnail	Play the specific channel by user defined interval.
Panorama	Play the specific channel continuously.

Search Selection Type

Time Based search selection is the most commonly used method



- Select the Date you wish to view by selecting a Date from Calendar.
- Select time you wish to view by selecting a time from Time Line.
- You may click on Refresh, Option, Backup, Import, Exit , Full Screen for additional features and options.



